

▲ **HYUNDAI CONSTRUCTION EQUIPMENT**

Head Office (Sales Office)
3F, BUNDANG FIRST TOWER, 55 BUNDANG-RO, BUNDANG-GU, SEONGNAM-SI,
GYEONGGI-DO, 13591, KOREA
www.hyundai-ce.com

PLEASE CONTACT

2019.11

MOVING YOU **FURTHER**

▲ **HYUNDAI**
CONSTRUCTION EQUIPMENT

HX300SL

With Tier 2 / Stage V Engine Installed

*Photo may include optional equipment.



Gross Power SAE J1995 / 250 HP (186 kW) at 2,200 rpm	Net Power SAE J1349 / 245 HP (183 kW) at 2,200 rpm	Travel Speed 5.9 km/hr (3.7 mph) / 3.3 km/hr (2.1 mph)	Operating Weight 30,200 kg / 66,580 lb
---	---	---	--

WHAT'S NEWEST AND BEST

Gross Power

SAE J1955 / 250 HP at 2,200 rpm

186 kW

Net Power

SAE J1349 / 245 HP at 2,200 rpm

183 kW

Travel Speed

3.7 mph

5.9 km/hr



WORK MAX, WORTH MAX

- New Variable Power Control
- Fuel Rate Information **Option**
- IPC(Intelligent Power Control)
- Attachment Flow Control **Option**
- ECO Gauge
- New Cooling System with Increased Air Flow
- Enlarged Air Inlet with Grill Cover
- Cycle Time Improvement



MORE RELIABLE, MORE SUSTAINABLE

- Durable Cooling Module
- Reinforced Pin, Bush, and Polymer Shim
- Reinforced Durability of Upper and Lower Structure and Attachments
- Wear Resistant Cover Plate
- Hi-grade (High-pressure) Hoses



INFOTAINMENT FRONTIER

- New Front Side Air Conditioning Systems
- Intelligent and Wide Cluster
- New Air Conditioning System
- Wi-Fi Direct with Smart Phone (Miracast) **Option**
- Proportional Auxiliary Hydraulic System **Option**
- Quick Coupler Button **Option**
- New Audio System



MODERN COMFORT, SIMPLE AND SAFE SOLUTION

- AAVM
(Advanced Around View Monitoring)
Camera System **Option**
- Hi-mate
(Remote Management System) **Option**
- Cab Suspension Mount
- Swing Lock System **Option**
- Fine Swing Control **Option**



*Photo may include optional equipment.

More fuel-efficiency
(Compared to 9S Series)

Leveling **12%** ↑

More fuel-efficiency
(Compared to 9S Series)

Truck loading **10%** ↑

Faster leveling **2%** ↑

OPTIMAL PERFORMANCE WITH FUEL EFFICIENCY

The HX Series is equipped with eco-friendly, high-performance engines that meet the Tier 4 Final emission requirements.

Eco Gauge

Eco gauge enables economic operation of machines. The gauge level and color displays engine torque and fuel efficiency level. On top of that, the status of fuel consumption such as average rate and the total amount of fuel consumed is displayed. Hourly and daily based fuel consumption can be checked in the detailed menu as well.




New Cooling System with Increased Air Flow

With the three-layer stacked up cooling module improving air inflow, the HX Series provides excellent cooling performance by increasing heat dissipation.



IPC (Intelligent Power Control)

The IPC controls power depending on work environments. Its mode can be selected and released on the monitor. On the excavation mode, pump flow can be easily controlled by a lever, reducing fuel consumption.

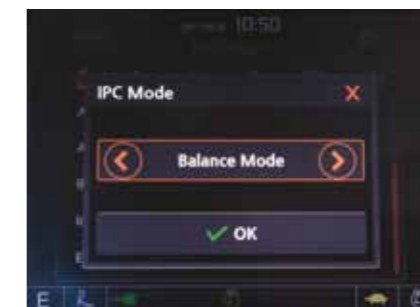

Attachment Flow Control **Option**

The HX Series improves pump flow rate by independent control of two pumps. It optimizes attachments for effective flow rate setting depending on attachments (tenbreaker types and ten crusher types), enabling various operations matching the site environments.



New Variable Power Control

The HX Series minimizes equipment input and output control signals to improve fuel efficiency. Its three-stage power mode ensures the highest performance in any operating environment.



* **P(power) mode** : Maximizes speed and power of the equipment for heavy load work.



* **S(standard) mode** : Optimizes performance and fuel efficiency of the equipment for general load work.



* **E(economy) mode** : Improves the control system for light load work.

*Photo may include optional equipment.

ROBUST AND SAFE STRUCTURAL DESIGN

The true value of the HX Series lies in its durability and high productivity.
The robust upper and lower frame structure can endure external shock and heavy work loads.
Attachment performance has been proven through rigorous field testing.
No matter how tough the working environment is, you can always rely on the HX series.

Reinforced Pin, Bush, and Polymer Shim
The HX Series improves lubricity of connecting parts between the equipment and attachments. Gaps with attachments are minimized by wear-resistant long-life pins, bushes, and polymer shims, supporting the highest performance with invariable durability.

Wear Resistant Cover Plate
A wear-resistant cover plate is installed at the end of the arm to minimize abrasion on the connector between the arm and the bucket. Vibration reduction of buckets enables more stable operation even in high-load work.



Durable Cooling Module
The HX Series has a durable cooling module that passed stringent tests, demonstrating the highest productivity in tough working environments.



Reinforced Durability of Upper and Lower Structure and Attachments
The upper and lower structure and attachments of the HX Series have higher durability than demanded on the site, as proven through numerous tests including road tests and virtual simulation. The wear resistance of the bucket has been improved by use of new material.



*Photo may include optional equipment.

ENHANCED INSTRUMENT PANEL FOR EASIER MONITORING

Many electronic functions are concentrated on the most convenient spot for operators to ensure work efficiency. The highly-advanced infotainment system, a product of HHI's intensive information technology, enables both productivity and pleasant work at the same time! The HX Series of HHI provides higher value and pleasure to customers.

Intelligent and Wide Cluster

The 8-inch interactive touchscreen display of the HX Series is 15% larger than that of the previous model. The centralized switches on the display allow the operator to check the urea level and the temperature outside the cab.



Wi-Fi Direct with Smart Phone (Miracast) Option

The smart terminal-miracast system usesthe Wi-fi from the operator's smart phone to easily and conveniently enable features of the smart phone, such as navigating, surfing the web, watching videos, and listening to music, on the 8" screen. (Currently only available for Android phones.)



New Air Conditioning System

Front side Air Vent holes make operators more convenient and fresh through direct air flow to driver's face, foot and body.



Proportional Auxiliary Hydraulic System Option


·Proportional control switch for better speed control
·Enlarge the operation convenience



New Front Side Air-conditioning System

The ventilation is designed for both warm and cool air reaching to operators' faces. It could helps operators create more neat and enjoyable atmosphere through indoor air circulation.

*Photo may include optional equipment.

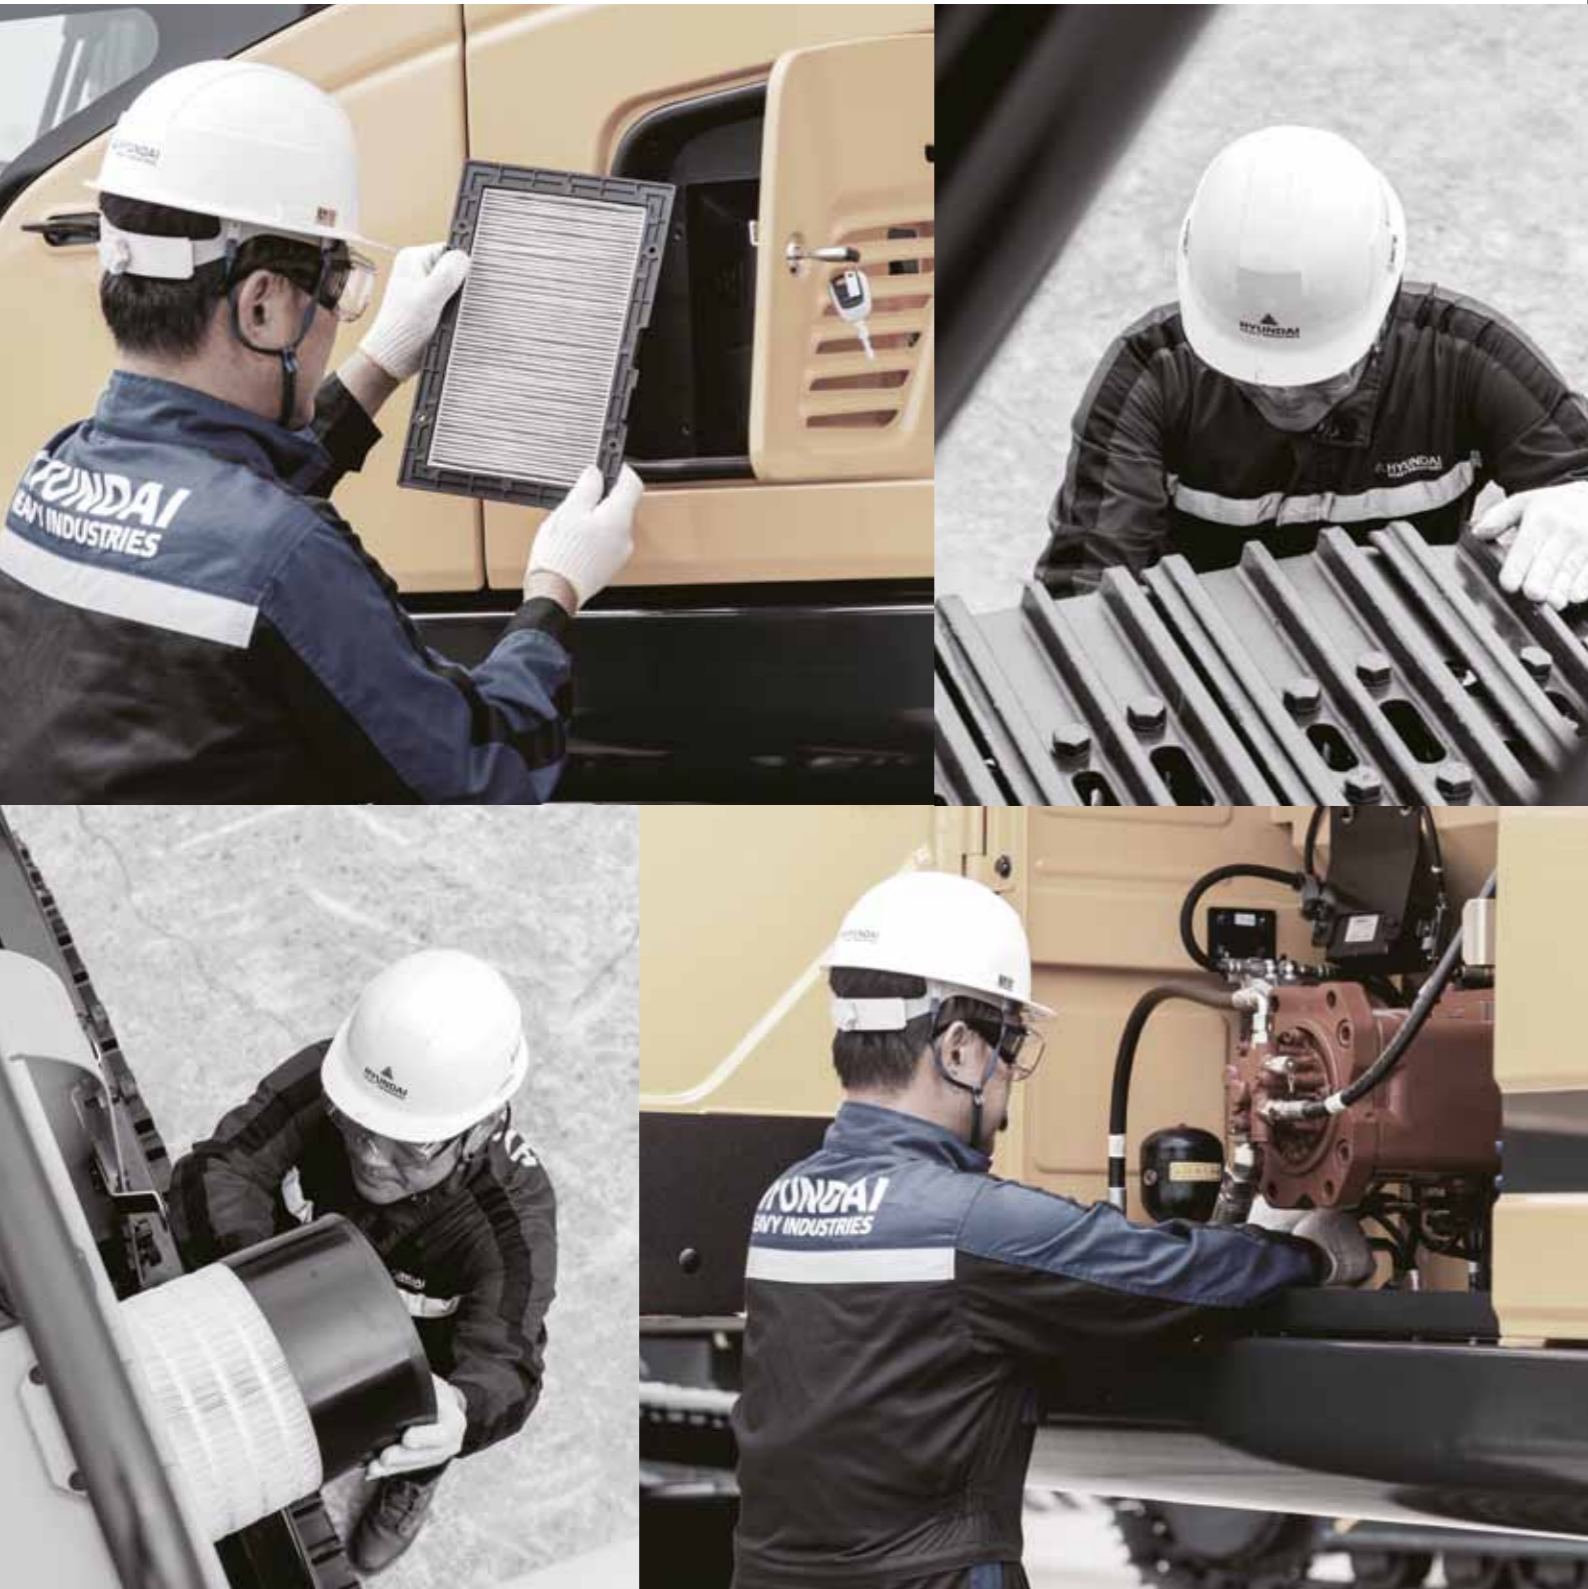

Cab Suspension Mount

With a low-vibration design by the coil spring and damper inside the mount, the cab suspension mount of the HX Series reduces noise inside the cabin and improves durability, providing a comfortable operation space that lessens operators' fatigue.

Swing Lock System Option

Swing lock system is provided to maintain stability when swing movement needs to be limited, improving operating speed and productivity.

Fine Swing Control Option

Fine swing control is available for customer's convenience when users want to control fine swing.

NEW EXTERIOR DESIGN FOR ROBUSTNESS AND SAFETY

The true value of the HX Series lies in its durability. The robust frame structure and the attachments show the real value of the HX Series in tough working environments and promise higher productivity.

The HX Series has a state-of-the-art AVM video camera system to secure field of vision for operators in all directions, thereby preventing accidents. Operators can easily check the workplace in the front and rear and to the right and left.

*AVM (Around View Monitoring) : Secure field of vision in all directions by nine views including 3D bird's eye view and 2D / 4CH view.

*IMOD (Intelligent Moving Object Detection) : Inform when people or dangerous objects are detected within the range of operation (Recognition distance : 5 m).



HiMATE

It's Convenient, Easy and Valuable

Hi-mate Hyundai's newly developed remote management system, utilizes GPS-satellite technology to provide customers with the highest level of service and product support available. Hi-mate enables users to remotely evaluate machine performance, access diagnostic information, and verify machine locations at the touch of a button.

What is benefits



Increase Productivity

It helps you operate machines in efficient. You can check the difference between total engine hours and actual working hours. See how productive your machines are and plan any required cost saving solutions. Hi MATE offers working information such as working / idling hours, fuel consumption and rate.



Convenient and Easy Monitoring

There is nothing much to do to monitor your machines. Just log on to the Hi MATE website or mobile application. Hi MATE allows you to watch your machines whenever and wherever you are.



Security

Protect your machines from theft or unauthorized usage with Hi MATE. If the machine moves out of the Geo-fence boundary, you will get alerts.

ADDITIONAL OPTIONS

Fuel Rate Information Option



Enlarged Air Inlet with Grill Cover

Enlarged vent hole of the air inlet side cover and fine net grill to prevent penetration of foreign materials further improve durability.



Cycle Time Improvement

The HX Series provides higher productivity on the site by faster operation: it loads trucks up to 1 % faster and levels up to 2 % faster than the 9S Series.

Hi-grade (High-pressure) Hoses

The HX Series uses high-pressure hoses with improved heat and pressure resistance, greatly increasing the durability of the equipment.



SPECIFICATIONS

ENGINE			
Maker / Model		HYUNDAI HM8.3	
Type		Water cooled, 4 cycle diesel, 6-cylinders in line, direct injection, turbocharged, charger air cooled, low emission	
Rated flywheel horse power	SAE	J1995 (gross)	250 HP (186 kW) at 2,200 rpm
		J1349 (net)	245 HP (183 kW) at 2,200 rpm
	DIN	6271 / 1 (gross)	253 PS (186 kW) at 2,200 rpm
		6271 / 1 (net)	248 PS (186 kW) at 2,200 rpm
Max. Power		265 HP (198 kW) at 2,000 rpm	
Max. torque		124 kgfm (899 lbfm) at 1,300 rpm	
Bore × Stroke		114 × 135 mm (4.49" × 5.31")	
Piston displacement		8,290 cc (506 cu in)	
Batteries		2 × 12 V × 150 Ah	
Starting motor		24 V × 7.2 kW	
Alternator		24 V × 90 A	

HYDRAULIC SYSTEM

MAIN PUMP

Type	Variable displacement tandem axis piston pumps
Max. flow	2 × 273 l/min
Sub-pump for pilot circuit	Gear pump

Cross-sensing and fuel saving pump system.

HYDRAULIC MOTORS

Travel	Two speed axial pistons motor with brake valve and parking brake
Swing	Axial piston motor with automatic brake

RELIEF VALVE SETTING

Implement circuits	350 kgf/cm ² (4,980 psi)
Travel	350 kgf/cm ² (4,980 psi)
Power boost (boom, arm, bucket)	380 kgf/cm ² (5,400 psi)
Swing circuit	300 kgf/cm ² (4,270 psi)
Pilot circuit	40 kgf/cm ² (570 psi)
Service valve	Installed

HYDRAULIC CYLINDERS

No. of cylinder bore × stroke	Boom : 2-Ø150 × 1,480 mm
	Arm : 1-Ø160 × 1,685 mm
	Bucket : 1-Ø140 × 1,285 mm

DRIVES & BRAKES

Drive method	Fully hydrostatic type
Drive motor	Axial piston motor, in-shoe design
Reduction system	Planetary reduction gear
Max. drawbar pull	26,500 kgf (58,420 lbf)
Max. travel speed (high / low)	5.9 km/hr (3.7 mph) / 3.3 km/hr (2.1 mph)
Gradeability	35° (70%)
Parking brake	Multi wet disc

CONTROL

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

Pilot control	Two joysticks with one safety lever (LH) : Swing and arm, (RH) : Boom and bucket (ISO)
Traveling and steering	Two levers with pedals
Engine throttle	Electric, dial type

SWING SYSTEM

Swing motor	Fixed displacement axial piston motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake	Multi wet disc
Swing speed	10.2 rpm

COOLANT & LUBRICANT CAPACITY

	liter	US gal	UK gal
Fuel tank	500	132.1	110.0
Engine coolant	25	6.6	5.5
Engine oil	26.5	7.0	5.8
Swing device	11	2.91	2.42
Final drive (each)	(8.0) 7.8	2.06	1.72
Hydraulic system (including tank)	330	87.2	72.6
Hydraulic tank	190	50.2	41.8

UNDERCARRIAGE

The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.

Center frame	X - leg type
Track frame	Pentagonal box type
No. of shoes on each side	48 EA
No. of carrier roller on each side	2 EA
No. of track roller on each side	9 EA
No. of rail guard on each side	2 EA

OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 6,450 mm (21' 2") boom, 3,200 mm (10' 6") arm, SAE heaped 1.44 m³ (1.88 yd³) bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipments.

OPERATING WEIGHT

Shoes		Operating weight		Ground pressure
Type	Width mm (in)	kg (lb)		kgf/cm ² (psi)
Triple grouser	600 (24")	HX300S L	30,200 (66,580)	0.58 (8.27)
		HX300S HW	32,490 (71,630)	0.63 (8.89)
	700 (28")	HX300S L	30,770 (67,840)	0.51 (7.22)
		HX300S HW	33,060 (72,880)	0.55 (7.76)
	800 (32")	HX300S L	31,150 (68,670)	0.45 (6.40)
		HX300S LR	33,910 (74,760)	0.49 (6.96)
Double grouser	700 (28")	HX300S HW	33,440 (73,720)	0.48 (6.87)
		HX300S HW	34,000 (74,960)	0.56 (7.96)


AIR CONDITIONING SYSTEM

The air condition system for the machine contains the fluorinated greenhouse gas with global warming potential of R134a. (Global Warming Potential : 1.430) The system hold 0.8 kg refrigerant consisting of a CO₂ equivalent 1.14 kg metric tonne. For more information, Please refer to the manual.

BUCKET SELECTION GUIDE & DIGGING FORCE


HX300S L DIMENSIONS

6.25 m (20' 6"), 10.2 m (33' 6") BOOM and 2.1 m (6' 11"), 2.5 m (8' 2"), 3.05 m (10' 0"), 3.75 m (12' 4"), 7.85m (25' 9") ARM

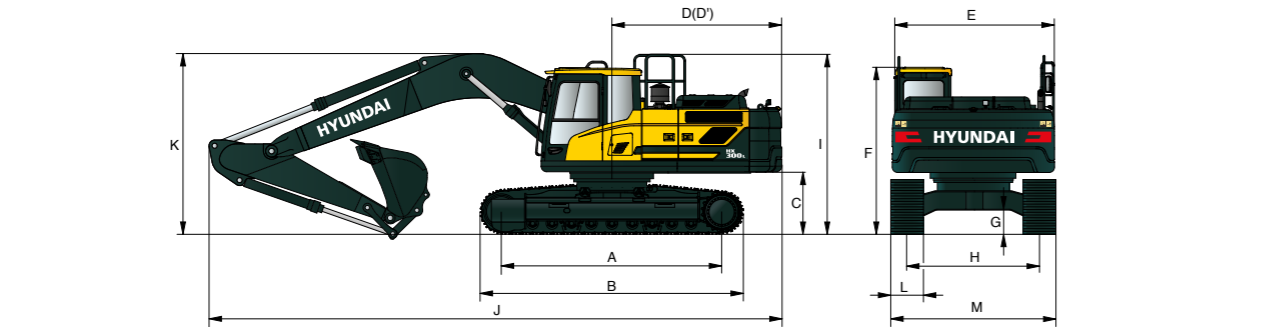

Unit : mm (ftn)					
A	Tumbler distance	4,030 (13' 3")			
B	Overall length of crawler	4,940 (16' 2")			
C	Ground clearance of counterweight	1,185 (3' 9")			
D	Tail swing radius	3,345 (11' 0")			
D'	Rear-end length	3,265 (10' 9")			
E	Overall width of upperstructure	2,980 (9' 9")			
F	Overall height of cab	3,130 (10' 3")			
G	Min. ground clearance	500 (1' 8")			
H	Track gauge	2,600 (8' 6")			
I	Overall height of guardrail (Opt)	3,336 (10' 11")			
Boom length		6,250 (20' 6")			
Arm length		2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")
J	Overall length	10,900 (35' 9")	10,850 (35' 7")	10,740 (35' 3")	10,810 (35' 6")
K	Overall height of boom	3,720 (12' 2")	3,560 (11' 8")	3,320 (10' 11")	3,570 (11' 9")
L Track shoe Width		600 (24")	700 (28")	800 (32")	
M Overall Width		3,200 (10' 6")	3,300 (10' 10")	3,400 (11' 1")	

HX300S L WORKING RANGE

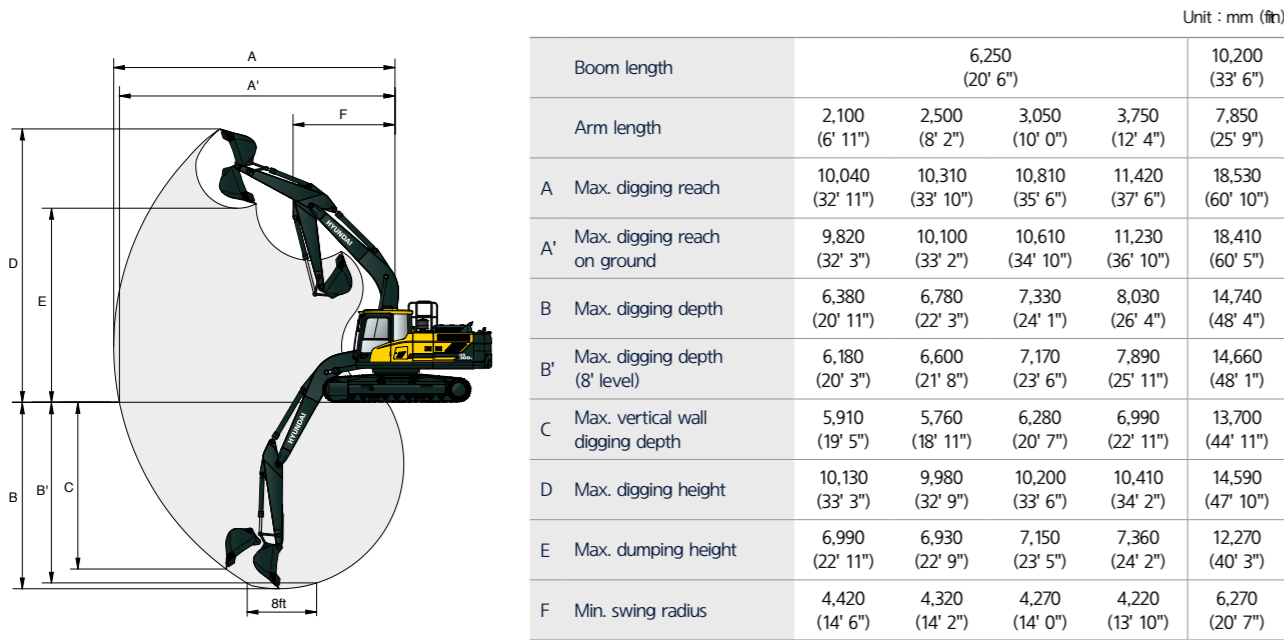


Unit : mm (ftn)					
Boom length		6,250 (20' 6")			
Arm length		2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")
A	Max. digging reach	10,040 (32' 11")	10,310 (33' 10")	10,810 (35' 6")	11,420 (37' 6")
A'	Max. digging reach on ground	9,820 (32' 3")	10,100 (33' 2")	10,610 (34' 10")	11,230 (36' 10")
B	Max. digging depth	6,380 (20' 11")	6,780 (22' 3")	7,330 (24' 1")	8,030 (26' 4")
B'	Max. digging depth (8' level)	6,180 (20' 3")	6,600 (21' 8")	7,170 (23' 6")	7,890 (25' 11")
C	Max. vertical wall digging depth	5,910 (19' 5")	5,760 (18' 11")	6,280 (20' 7")	6,990 (22' 11")
D	Max. digging height	10,130 (33' 3")	9,980 (32' 9")	10,200 (33' 6")	10,410 (34' 2")
E	Max. dumping height	6,990 (22' 11")	6,930 (22' 9")	7,150 (23' 5")	7,360 (24' 2")
F	Min. swing radius	4,420 (14' 6")	4,320 (14' 2")	4,270 (14' 0")	4,220 (13' 10")

BUCKET SELECTION GUIDE & DIGGING FORCE


HX300S HW DIMENSIONS

6.25 m (20' 6") BOOM and 2.1 m (6' 11"), 2.5 m (8' 2"), 3.05 m (10' 0"), 3.75 m (12' 4") ARM

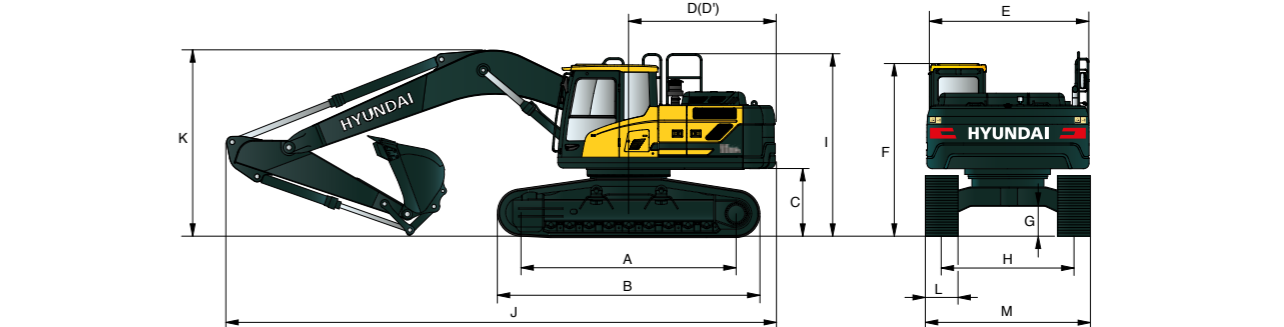

Unit : mm (ftn)					
A	Tumbler distance	4,030 (13' 3")			
B	Overall length of crawler	5,010 (16' 5")			
C	Ground clearance of counterweight	1,490 (4' 11")			
D	Tail swing radius	3,345 (11' 0")			
D'	Rear-end length	3,265 (10' 9")			
E	Overall width of upperstructure	2,980 (9' 9")			
F	Overall height of cab	3,435 (11' 3")			
G	Min. ground clearance	765 (2' 6")			
H	Track gauge	2,870 (9' 5")			
I	Overall height of guardrail	3,650 (12' 0")			
Boom length		6,250 (20' 6")			
Arm length		2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")
J	Overall length	10,870 (35' 8")	10,780 (35' 4")	10,590 (34' 9")	10,670 (35' 0")
K	Overall height of boom	3,830 (12' 7")	3,660 (12' 0")	3,440 (11' 3")	3,540 (11' 7")
L Track shoe Width		600 (24")	700 (28")	800 (32")	
M Overall Width		3,470 (11' 5")	3,570 (11' 9")	3,670 (12' 0")	

HX300S HW WORKING RANGE

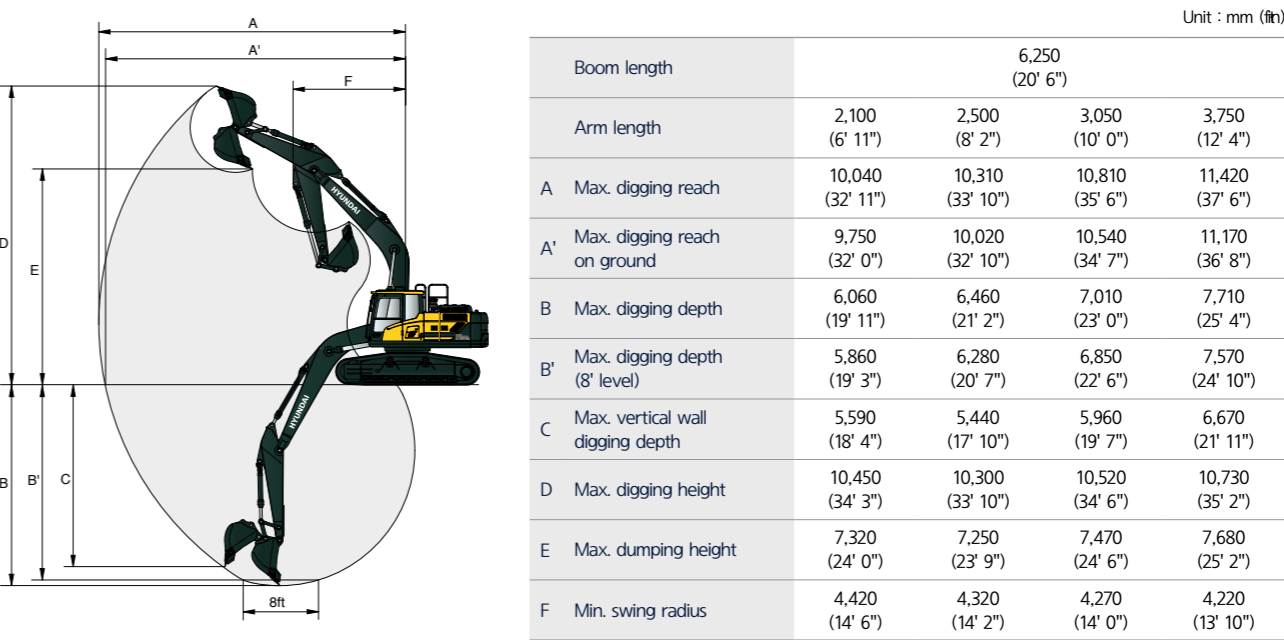

Unit : mm (ftn)					
Boom length		6,250 (20' 6")			
Arm length		2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")
A	Max. digging reach	10,040 (32' 11")	10,310 (33' 10")	10,810 (35' 6")	11,420 (37' 6")
A'	Max. digging reach on ground	9,750 (32' 0")	10,020 (32' 10")	10,540 (34' 7")	11,170 (36' 8")
B	Max. digging depth	6,060 (19' 11")	6,460 (21' 2")	7,010 (23' 0")	7,710 (25' 4")
B'	Max. digging depth (8' level)	5,860 (19' 3")	6,280 (20' 7")	6,850 (22' 6")	7,570 (24' 10")
C	Max. vertical wall digging depth	5,590 (18' 4")	5,440 (17' 10")	5,960 (19' 7")	6,670 (21' 11")
D	Max. digging height	10,450 (34' 3")	10,300 (33' 10")	10,520 (34' 6")	10,730 (35' 2")
E	Max. dumping height	7,320 (24' 0")	7,250 (23' 9")	7,470 (24' 6")	7,680 (25' 2")
F	Min. swing radius	4,420 (14' 6")	4,320 (14' 2")	4,270 (14' 0")	4,220 (13' 10")

BUCKET SELECTION GUIDE & DIGGING FORCE

BUCKETS

All buckets are welded with high-strength steel.



SAE heaped	1.27 (1.66)	◆ 1.27 (1.66)	◆ 1.16 (1.52)	◆ 1.33 (1.74)	★ 0.52 (0.68)
m³ (yd³)	1.50 (1.96)	◆ 1.46 (1.91)	◆ 1.49 (1.95)		
	1.73 (2.26)				
	1.85 (2.42)				

Capacity m³ (yd³)		Width mm (in)	Weight kg (lb)	Tooth EA	Recommendation mm (ftin)				
SAE heaped	CECE heaped	Without side cutters			6,250 (20' 6") Boom				10,200 (33' 6") Boom
					2,100 (6' 11") Arm	2,500 (8' 2") Arm	3,050 (10' 0") Arm	3,750 (12' 4") Arm	7,850 (25' 9") Arm
★0.52 (0.68)	0.45 (0.59)	935 (36.8")	460 (1,010)	5	-	-	-	-	●
1.27 (1.66)	1.10 (1.44)	1,290 (50.8")	1,010 (2,230)	5	●	●	●	●	-
1.50 (1.96)	1.30 (1.7)	1,490 (58.7")	1,080 (2,380)	5	●	●	●	■	-
1.73 (2.26)	1.50 (1.96)	1,700 (66.9")	1,170 (2,580)	6	●	■	●	▲	-
1.85 (2.42)	1.60 (2.09)	1,800 (70.9")	1,230 (2,710)	6	■	■	●	▲	-
◆1.27 (1.66)	1.10 (1.44)	1,310 (51.6")	1,240 (2,730)	5	●	●	●	■	-
◆1.46 (1.91)	1.28 (1.67)	1,460 (57.5")	1,320 (2,910)	5	●	●	●	■	-
◆1.16 (1.52)	1.00 (1.31)	1,340 (52.8")	1,280 (2,820)	5	●	●	●	-	-
◆1.33 (1.74)	1.16 (1.52)	1,420 (55.9")	1,440 (3,170)	5	●	●	●	-	-
◆1.49 (1.95)	1.28 (1.67)	1,620 (63.8")	1,440 (3,170)	5	●	●	●	-	-

◆ Heavy duty bucket
◆ Rock-Heavy duty bucket
★ Long reach bucket

● : Applicable for materials with density of 2,100 kgf/m³ (3,500 lbf/yd³) or less
● : Applicable for materials with density of 1,800 kgf/m³ (3,000 lbf/yd³) or less
■ : Applicable for materials with density of 1,500 kgf/m³ (2,500 lbf/yd³) or less
▲ : Applicable for materials with density of 1,200 kgf/m³ (2,000 lbf/yd³) or less

ATTACHMENT

Booms and arms are of all-welded, low-stress, full-box section design.
6.250 mm (20' 6"), 10.200 mm (33' 6") Booms and
2,100 mm (6' 11"), 2,500 mm (8' 2"), 3.050mm (10' 0"), 3,750mm (12' 4"),
7,850 mm (25' 9") Arms are available, Hyundai Bucket are all-welded,
high-strength steel implements.

DIGGING FORCE













Boom	Length	mm (ftin)	6,250 (20' 6")				10,200 (33' 6")	Remark
	Weight	kg (lb)	2,780 (6,130)				3,530 (7,780)	
Arm	Length	mm (ftin)	2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")	7,850 (25' 9")	
	Weight	kg (lb)	1,345 (2,970)	1,430 (3,150)	1,545 (3,410)	1,675 (3,690)	1,685 (3,710)	
Bucket Digging Force	SAE	kN	164.8 [179.8]	165.7 [180.8]	165.7 [180.8]	166.7 [181.9]	70.6	[] : Power Boost
		kgf	16,800 [18,330]	16,900 [18,440]	16,900 [18,440]	17,000 [18,550]	7,200	
		lbf	37,040 [40,410]	37,260 [40,650]	37,260 [40,650]	37,480 [40,900]	15,870	
	ISO	kN	191.2 [208.6]	191.2 [208.6]	192.2 [209.7]	192.2 [209.7]	82.4	
		kgf	19,500 [21,270]	19,500 [21,270]	19,600 [21,380]	19,600 [21,380]	8,400	
		lbf	42,990 [46,890]	42,990 [46,890]	43,210 [47,130]	43,210 [47,130]	18,520	
Arm Crowd Force	SAE	kN	180.4 [196.8]	155.9 [170.1]	131.4 [143.4]	114.7 [125.1]	47.1	
		kgf	18,400 [20,070]	15,900 [17,350]	13,400 [14,620]	11,700 [12,760]	4,800	
		lbf	40,570 [44,250]	35,050 [38,250]	29,540 [32,230]	25,790 [28,130]	10,580	
	ISO	kN	190.3 [207.5]	163.8 [178.7]	136.3 [148.7]	119.6 [130.5]	48.1	
		kgf	19,400 [21,160]	16,700 [18,220]	13,900 [15,160]	12,200 [13,310]	4,900	
		lbf	42,770 [46,650]	36,820 [40,170]	30,640 [33,420]	26,900 [29,340]	10,800	











Note : Boom weight includes arm cylinder, piping, and pin
Arm weight includes bucket cylinder, linkage, and pin



LIFTING CAPACITY

 Rating over-front  Rating over-side or 360 degree











HX300S L												
6.25 m (20' 6") boom, 3.05 m (10' 0") arm equipped with 5,200 kg counter weight and 600 mm (24") triple grouser shoe.												
Load point height m (ft)	Load radius										At max. reach	
	3.0m (9.8 ft)		4.5m (14.8 ft)		6.0m (19.7 ft)		7.5m (24.6 ft)		9.0m (29.5 ft)		Capacity	
												
7.5 m (24.6 ft)	kg										*4,410	*4,410
	lb										*9,720	*9,720
6.0 m (19.7 ft)	kg						*6,490	5,710			*4,220	*4,220
	lb						*14,310	12,590			*9,300	*9,300
4.5 m (14.8 ft)	kg						*6,980	5,540			*4,210	4,200
	lb						*15,390	12,210			*9,280	9,260
3.0 m (9.8 ft)	kg						*7,720	5,320	*5,490	4,000	*4,340	3,900
	lb						*17,020	11,730	*12,100	8,820	*9,570	8,600
1.5 m (4.9 ft)	kg						8,210	5,110	*6,190	3,900	*4,640	3,790
	lb						18,100	11,270	*13,650	8,600	*10,230	8,360
Ground Line	kg						8,040	4,950			*5,160	3,870
	lb						17,730	10,910			*11,380	8,530
-1.5 m (-4.9 ft)	kg	*11,100	*11,100	*15,950	10,110	11,160	6,640	7,970	4,890		*6,050	4,180
	lb	*24,470	*24,470	*35,160	22,290	24,600	14,640	17,570	10,780		*13,340	9,220
-3.0 m (-9.8 ft)	kg	*17,910	*17,910	*15,100	10,220	11,210	6,690	8,050	4,960		*7,770	4,870
	lb	*39,480	*39,480	*33,290	22,530	24,710	14,750	17,750	10,930		*17,130	10,740
-4.5 m (-14.8 ft)	kg	*18,100	*18,100	*13,040	10,520	*9,550	6,920				*8,810	6,480
	lb	*39,900	*39,900	*28,750	23,190	*21,050	15,260				*19,420	14,290
-6.0 m (-19.7 ft)	kg											
	lb											











6.25 m (20' 6") boom, 2.10 m (6' 11") arm equipped with 5,200 kg counter weight and 600 mm (24") triple grouser shoe.												
Load point height m (ft)	Load radius										At max. reach	
	3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach	
											m (ft)	
7.5 m (24.6 ft)	kg				*7,670	*7,670			*7,890	7,270		6.40
	lb				*16,910	*16,910			*17,390	16,030		(21.0)
6.0 m (19.7 ft)	kg				*7,900	*7,900			*7,790	5,630		7.44
	lb				*17,420	*17,420			*17,170	12,410		(24.4)
4.5 m (14.8 ft)	kg				*8,950	7,670	*7,930	5,470	7,630	4,850		8.06
	lb				*19,730	16,910	*17,480	12,060	16,820	10,690		(26.5)
3.0 m (9.8 ft)	kg				*10,270	7,270	8,410	5,290	7,090	4,480		8.37
	lb				*22,640	16,030	18,540	11,660	15,630	9,880		(27.5)
1.5 m (4.9 ft)	kg				*11,350	6,960	8,220	5,130	6,960	4,380		8.40
	lb				*25,020	15,340	18,120	11,310	15,340	9,660		(27.6)
Ground Line	kg				11,330	6,810	8,120	5,040	7,220	4,520		8.16
	lb				24,980	15,010	17,900	11,110	15,920	9,960		(26.8)
-1.5 m (-4.9 ft)	kg			*15,530	10,360	11,310	6,800	8,160	5,070	8,020	4,990	7.60
	lb			*34,240	22,840	24,930	14,990	17,990	11,180	17,680	11,000	(24.9)
-3.0 m (-9.8 ft)	kg	*18,440	*18,440	*14,030	10,560	*10,600	6,940			*9,060	6,090	6.66
	lb	*40,650	*40,650	*30,930	23,280	*23,370	15,300			*19,970	13,430	(21.9)
-4.5 m (-14.8 ft)	kg			*10,580	*10,580					*8,760	*8,760	5.12
	lb			*23,320	*23,320					*19,310	*19,310	(16.8)

1 1 | Lifting capacity are based on ISO 10567. 1 2 | Lifting capacity of the Robex Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity. 1 3 | The Lift-point is bucket pivot mounting pin on the arm (without bucket mass). 1 4 | (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY













 Rating over-front  Rating over-side or 360 degree

HX300S L												
6.25 m (20' 6") boom, 2.50 m (8' 2") arm equipped with 5,200 kg counter weight and 600 mm (24") triple grouser shoe.												
Load point height m (ft)	Load radius										At max. reach	
	3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach	
											m (ft)	
7.5 m (24.6 ft)	kg				*6,980	*6,980			*6,760	6,760		6.74
	lb				*15,390	*15,390			*14,900	14,900		(22.1)
6.0 m (19.7 ft)	kg				*7,380	*7,380	*7,170	5,630	*6,440	5,330		7.74
	lb				*16,270	*16,270	*15,810	12,410	*14,200	11,750		(25.4)
4.5 m (14.8 ft)	kg				*10,660	*10,660	*7,530	5,500	*6,420	4,620		8.34
	lb				*23,500	*23,500	*16,600	12,130	*14,150	10,190		(27.4)
3.0 m (9.8 ft)	kg				*13,720	10,980	*9,850	7,320	*8,180	5,300		8.64
	lb				*30,250	24,210	*21,720	16,140	*18,030	11,680		(28.3)
1.5 m (4.9 ft)	kg				*11,040	6,970	8,220	5,120	6,630	4,160		8.67
	lb				*24,340	15,370	18,120	11,290	14,620	9,170		(28.4)
Ground Line	kg				*16,170	10,220	11,300	6,770	8,080	5,000		8.43
	lb				*35,650	22,530	24,910	14,930	17,810	11,020		(27.7)
-1.5 m (-4.9 ft)	kg	*11,150	*11,150	*15,780	10,240	11,240	6,730	8,060	4,980	7,520	4,670	7.89
	lb	*24,580	*24,580	*34,790	22,580	24,780	14,840	17,770	10,980	16,580	10,300	(25.9)
-3.0 m (-9.8 ft)	kg	*19,830	*19,830	*14,550	10,410	*10,980	6,830			*9,000	5,590	6.99
	lb	*43,720	*43,720	*32,080	22,950	*24,210	15,060			*19,840	12,320	(22.9)
-4.5 m (-14.8 ft)	kg	*15,970	*15,970	*11,820	10,790					*9,210	7,980	5.55
	lb	*35,210	*35,210	*26,060	23,790					*20,300	17,590	(18.2)















6.25 m (20' 6") boom, 3.75 m (12' 4") arm equipped with 5,200 kg counter weight and 600 mm (24") triple grouser shoe.																
Load point height m (ft)		Load radius										At max. reach				
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		9.0 m (29.5 ft)		Capacity	Reach	
														m (ft)		
9.0 m (29.5 ft)	kg													*3,820	*3,820	6.87
	lb													*8,420	*8,420	(22.6)
7.5m (24.6 ft)	kg									*5,120	*5,120			*3,490	*3,490	8.14
	lb									*11,290	*11,290			*7,690	*7,690	(26.7)
6.0 m (19.7 ft)	kg									*5,700	*5,700			*3,370	*3,370	8.97
	lb									*12,570	*12,570			*7,430	*7,430	(29.4)
4.5 m (14.8 ft)	kg							*6,830	*6,830	*6,290	5,620	*5,230	4,140	*3,370	*3,370	9.50
	lb							*15,060	*15,060	*13,870	12,390	*11,530	9,130	*7,430	*7,430	(31.2)
3.0 m (9.8 ft)	kg					*10,960	*10,960	*8,340	7,530	*7,110	5,370	6,370	4,020	*3,490	*3,490	9.76
	lb					*24,160	*24,160	*18,390	16,600	*15,670	11,840	14,040	8,860	*7,690	*7,690	(32.0)
1.5 m (4.9 ft)	kg					*13,740	10,700	*9,850	7,070	*7,970	5,120	6,230	3,890	*3,720	3,400	9.79
	lb					*30,290	23,590	*21,720	15,590	*17,570	11,290	13,730	8,580	*8,200	7,500	(32.1)
Ground Line	kg			*6,810	*6,810	*15,380	10,180	*10,980	6,740	8,020	4,920	6,110	3,780	*4,110	3,450	9.58
	lb			*15,010	*15,010	*33,910	22,440	*24,210	14,860	17,680	10,850	13,470	8,330	*9,060	7,610	(31.4)
-1.5 m (-4.9 ft)	kg	*7,070	*7,070	*10,570	*10,570	*15,920	10,000	11,090	6,570	7,890	4,810	*5,710	3,740	*4,750	3,680	9.11
	lb	*15,590	*15,590	*23,300	*23,300	*35,100	22,050	24,450	14,480	17,390	10,600	*12,590	8,250	*10,470	8,110	(29.9)
-3.0 m (-9.8 ft)	kg	*11,090	*11,090	*15,460	*15,460	*15,540	10,020	11,060	6,540	7,890	4,800			*5,900	4,180	8.35
	lb	*24,450	*24,450	*34,080	*34,080	*34,260	22,090	24,380	14,420	17,390	10,580			*13,010	9,220	(27.4)
-4.5 m (-14.8 ft)	kg	*15,990	*15,990	*20,280	*20,280	*14,140	10,230	*10,510	6,680					*8,250	5,240	7.19
	lb	*35,250	*35,250	*44,710	*44,710	*31,170	22,550	*23,170	14,730					*18,190	11,550	(23.6)
-6.0 m (-19.7 ft)	kg			*15,400	*15,400	*10,850	10,700							*8,670	8,240	5.38
	lb			*33,950	*33,950	*23,920	23,590							*19,110	18,170	(17.6)

LIFTING CAPACITY

 Rating over-front  Rating over-side or 360 degree

HX300S HW													
6.25 m (20' 6") boom, 3.05 m (10' 0") arm equipped with 5,200 kg counter weight and 600 mm (24") triple grouser shoe.													
Load point height m (ft)	Load radius										At max. reach		
	3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		9.0 m (29.5 ft)		Capacity		Reach m (ft)
													
9.0 m (29.5 ft)	kg										*4,760	*4,760	6.34
	lb										*10,490	*10,490	(20.8)
7.5 m (24.6 ft)	kg						*5,020	*5,020			*4,340	*4,340	7.63
	lb						*11,070	*11,070			*9,570	*9,570	(25.0)
6.0 m (19.7 ft)	kg				*6,840	*6,840	*6,560	*6,560			*4,200	*4,200	8.45
	lb				*15,080	*15,080	*14,460	*14,460			*9,260	*9,260	(27.7)
4.5 m (14.8 ft)	kg		*10,120	*10,120	*8,080	*8,080	*7,140	6,600			*4,230	*4,230	8.95
	lb		*22,310	*22,310	*17,810	*17,810	*15,740	14,550			*9,330	*9,330	(29.4)
3.0 m (9.8 ft)	kg		*13,160	*13,160	*9,540	8,830	*7,900	6,370	*5,780	4,830	*4,400	*4,400	9.17
	lb		*29,010	*29,010	*21,030	19,470	*17,420	14,040	*12,740	10,650	*9,700	*9,700	(30.1)
1.5 m (4.9 ft)	kg		*15,250	12,840	*10,800	8,440	*8,620	6,150	*6,100	4,730	*4,740	4,630	9.14
	lb		*33,620	28,310	*23,810	18,610	*19,000	13,560	*13,450	10,430	*10,450	10,210	(30.0)
Ground	kg	*6,560	*6,560	*16,020	12,580	*11,570	8,220	8,630	6,020		*5,320	4,790	8.86
Line	lb	*14,460	*14,460	*35,320	27,730	*25,510	18,120	19,030	13,270		*11,730	10,560	(29.1)
-1.5 m (-4.9 ft)	kg	*12,500	*12,500	*15,840	12,570	*11,710	8,150	8,590	5,980		*6,340	5,240	8.29
	lb	*27,560	*27,560	*34,920	27,710	*25,820	17,970	18,940	13,180		*13,980	11,550	(27.2)
-3.0 m (-9.8 ft)	kg	*19,800	*19,800	*14,760	12,720	*11,060	8,230				*8,390	6,240	7.36
	lb	*43,650	*43,650	*32,540	28,040	*24,380	18,140				*18,500	13,760	(24.2)
-4.5 m (-14.8 ft)	kg	*17,010	*17,010	*12,280	*12,280						*8,860	8,700	5.93
	lb	*37,500	*37,500	*27,070	*27,070						*19,530	19,180	(19.4)

HX300S LR													
10.20 m (?) boom, 78.5 m (25' 9") arm equipped with 7,000 kg counter weight and 800 mm (?) triple grouser shoe.													

Load point height m (ft)	Load radius												At max. reach	
	15 m (49 ft)	30 m (98 ft)	45 m (148 ft)	60 m (197 ft)	75 m (246 ft)	90 m (295 ft)	105 m (344 ft)	120 m (394 ft)	135 m (443 ft)	150 m (492 ft)	165 m (541 ft)	Capacity	Reach	m (ft)
														
135 m (443 ft)	kg											*750	*750	1291
	lb											*1,650	*1,650	(424)
120 m (394 ft)	kg								*1,000	*1,000		*690	*690	1411
	lb								*2,200	*2,200		*1,520	*1,520	(463)
105 m (344 ft)	kg								*1,300	*1,300	*700	*700	*660	1506
	lb								*2,870	*2,870	*1,540	*1,540	*1,460	(494)
90 m (295 ft)	kg								*1,480	*1,480	*1,090	*1,090	*650	1582
	lb								*3,260	*3,260	*2,400	*2,400	*1,430	(519)
75 m (246 ft)	kg								*1,650	*1,650	*1,340	*1,340	*640	1640
	lb								*3,640	*3,640	*2,950	*2,950	*1,410	(538)
60 m (197 ft)	kg							*2,010	*2,010	*1,850	*1,540	*1,540	*650	1683
	lb							*4,430	*4,430	*4,080	*3,400	*3,400	*1,430	(552)
45 m (148 ft)	kg						*2,570	*2,570	*2,370	*2,120	*1,750	*1,750	*670	1711
	lb						*5,670	*5,670	*5,220	*4,670	*3,860	*3,860	*1,480	(561)
30 m (98 ft)	kg			*8,050	*8,050		*4,570	*4,570	*3,880	*3,880	*3,430	*3,430	*2,910	1725
	lb			*17,750	*17,750		*10,080	*10,080	*8,550	*8,550	*7,560	*7,560	*6,420	(566)
15 m (49 ft)	kg			*4,070	*4,070	*7,170	*7,170	*5,470	*5,470	*4,490	4,450	*3,860	3,550	1727
	lb			*8,970	*8,970	*15,810	*15,810	*12,060	*12,060	*9,900	9,810	*8,510	7,830	(567)
Ground	kg			*3,010	*3,010	*7,180	7,030	*6,260	5,270	*5,050	4,130	*4,270	3,320	1715
Line	lb			*6,640	*6,640	*15,830	15,500	*13,800	11,620	*11,130	9,110	*9,410	7,320	(563)
-15 m (-49 ft)	kg	*1,280	*1,280	*1,770	*1,770	*3,090	*3,090	*5,900	*5,900	*6,890	4,920	*5,520	3,870	1690
	lb	*2,820	*2,820	*3,900	*3,900	*6,810	*6,810	*13,010	*13,010	*15,190	10,850	*12,170	8,530	(554)
-30 m (-98 ft)	kg	*1,920	*1,920	*2,410	*2,410	*3,550	*3,550	*5,840	*5,840	*7,330	4,700	*5,890	3,690	1650
	lb	*4,230	*4,230	*5,310	*5,310	*7,890	*7,890	*12,870	*12,870	*16,160	10,360	*12,990	8,140	(541)
-45 m (-148 ft)	kg	*2,570	*2,570	*3,100	*3,100	*4,190	*4,190	*6,310	6,230	*7,600	4,580	6,110	3,570	1596
	lb	*5,670	*5,670	*6,830	*6,830	*9,240	*9,240	*13,910	13,730	*16,760	10,100	13,470	7,870	(523)
-60 m (-187 ft)	kg	*3,270	*3,270	*3,860	*3,860	*5,000	*5,000	*7,130	6,220	*7,700	4,530	6,060	3,520	1524
	lb	*7,210	*7,210	*8,510	*8,510	*11,020	*11,020	*15,720	13,710	*16,980	9,990	13,360	7,760	(500)
-75 m (-246 ft)	kg	*4,020	*4,020	*4,710	*4,710	*5,970	*5,970	*8,300	6,290	*7,620	4,560	6,070	3,530	1433
	lb	*8,860	*8,860	*10,380	*10,380	*13,160	*13,160	*18,300	13,870	*16,800	10,050	13,390	7,780	(470)
-90 m (-295 ft)	kg	*4,850	*4,850	*5,690	*5,690	*7,170	*7,170	*9,220	6,440	*7,350	4,650	*6,040	3,600	1319
	lb	*10,690	*10,690	*12,540	*12,540	*15,810	*15,810	*20,330	14,200	*16,200	10,250	*13,320	7,940	(433)
-105 m (-344 ft)	kg	*5,790	*5,790	*6,860	*6,860	*8,720	*8,720	*8,490	6,660	*6,820	4,810	*5,610	3,730	1174
	lb	*12,760	*12,760	*15,120	*15,120	*19,220	*19,220	*18,720	14,680	*15,040	10,600	*12,370	8,220	(385)
-120 m (-394 ft)	kg			*8,320	*8,320	*9,440	*9,440	*7,340	6,990	*5,900	5,070	*4,770	3,950	985
	lb			*18,340	*18,340	*20,810	*20,810	*16,180	15,410	*13,010	11,180	*10,520	8,710	(323)
-135 m (-443 ft)	kg													
	lb													

1 | 1 Lifting capacity are based on ISO 10567. | 2 | Lifting capacity of the Robex Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity. | 3 | The Lift-point is bucket pivot mounting pin on the arm (without bucket mass). | 4 | (*) indicates load limited by hydraulic capacity.

STANDARD / OPTION

ENGINE	STD
Hyundai HM8.3 Engine	●
HYDRAULIC SYSTEM	STD
Intelligent Power Control (IPC)	
3-power mode, 2-work mode, user mode	●
Variable power control	●
Pump flow control	●
Attachment mode flow control	
Engine auto idle	●
Engine auto shutdown control	
CAB & INTERIOR	STD
ISO Standard Cabin	
Rise-up type windshield wiper	●
Radio / USB player	●
Handsfree mobile phone system with USB	●
12 V power outlet (24 V DC to 12 V DC converter)	●
Electric horn	●
All-weather steel cab with 360° visibility	●
Safety glass windows	●
Sliding fold-in front window	●
Sliding side window (LH)	●
Lockable door	●
Hot & Cool box	●
Storage compartment & Ashtray	●
Sun visor	●
Door and cab locks, one key	●
Pilot-operated slidable joystick	●
Cabin lights	
Cabin front window rain guard	
Cabin roof-steel cover	●
Automatic Climate Control	
Air conditioner & Heater	●
Defroster	●
Starting aid (air grid heater) for cold weather	●
Centralized Monitoring	
8" LCD display - Normal type	●
8" LCD display - Premium type	
Engine speed or trip meter / Accel	●
Engine coolant temperature gauge	●
Max power	●
Low speed / High speed	●
Auto idle	●
Overload	●
Check engine	●
Air cleaner clogging	●
Indicators	●
ECO gauges	●
Fuel level gauge	●
Hyd. oil temperature gauge	●
Warnings	●
Communication error	●
Low battery	●
Clock	●
Seat	
Mechanical suspension without heater	●
Mechanical suspension with heater	
Adjustable air suspension without heater	
Adjustable air suspension with heater	
Cabin FOPS/FOG	
FOPS (Falling object protective structures)	
ISO 3449 Level 2	
FOG (Falling object guard)	Front & Tops guard
ISO/DIS 10262 Level 2	Top guard
Cabin ROPS	
ROPS (Roll over protective structures)ISO 12117-2	

SAFETY	STD
Battery master switch	●
Rearview camera	
AAVM (Advanced around view monitoring)	
Six front working lights (4 boom mounted, 2 front frame mounted)	●
Travel alarm	●
Rear work lamp	
Beacon lamp	
Automatic swing brake	●
Boom holding system	●
Arm holding system	●
Safety lock valve for boom cylinder with overload warning device	
Safety lock valve for arm cylinder	
Swing Lock system	
Two outside rearview mirror	●
OTHER	STD
Booms	
6.45 m, 20' 6" Mono	●
10.20 m, 33' 6" Long Reach	
Arms	
2.10 m, 6' 11"	
2.85 m, 9' 4"	
2.5 m, 8' 2"	
3.05 m, 10' 0"	●
3.75 m, 12' 4"	
7.85 m, 25' 9" Long Reach	
Removable clean-out dust net for cooler	●
Removable washer tank	●
Fuel pre-filter	●
Fuel warmer	
Self-diagnostics system	●
Hi-mate (Remote management system)	
Batteries (2 × 12 V × 150 AH)	●
Fuel filler pump (50 ℓ/min)	
Single-acting piping kit (Breaker, etc.)	
Double-acting piping kit (Clamshell, etc.)	
Rotating piping kit	
Quick coupler piping	
Quick coupler	
Accumulator for lowering work equipment	●
Pattern change valve (4 patterns)	
Fine swing control system	
General type guardrail	
Tool kit	
UNDERCARRIAGE	STD
Lower frame under cover (Additional)	
Lower frame under cover (Normal)	●
Track Shoes	
Triple grousers shoes (600 mm, 24")	●
Triple grousers shoe (700 mm, 28")	
Triple grousers shoe (800 mm, 32")	

* Standard and optional equipment may vary. Contact your hyundai dealer for more information.
The machine may vary according to international standards.
* The photos may include attachments and optional equipment that are not available in your area.
* Materials and specifications are subject to change without advance notice.
* All Imperial measurements rounded off to the nearest pound or inch.

MEMO